



Aardee established 1941
building security

Product Specification - Industrial



Curtain

Curtain formed in 75mm concave galvanised steel lath, complete with nylon endlocks. Galvanised steel "L" or "T" section bottom rail specially formed to interlock with curtain.

Options

Available in plastisol or powder-coated finish. Windlocks.

Guides

65mm x 65mm x 32mm or 75mm x 75mm x 32mm galvanised steel channels welded to galvanised steel support angles Complete with Hex Headplate. (size subject to shutter height).

Options

65mm or 100mm wind guide.



Operation

Shutter operated by a Guthrie Douglas 3-phase Safedrive® direct drive motor with digital limits. Complete with plug in digital control panel with service counter.

Options

PDT Rollertec remote control, wireless safety edge or photo-cell.


Shutter Enclosure

Hex box or Fascia plate can be supplied if required (at additional cost)
PPC Galvanised steel or plastisol finish available.

Safety

Safety breaks are installed over the doorway on all shutters to comply with DHF regulations. Low voltage {24V} wiring to all user switches and controls for operator safety.


All our shutters are available in galvanised steel, plastisol steel or powder-coated steel and come in a wide selection of RAL colours.

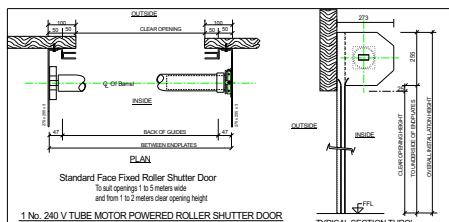

1 No. 240 V TUBE MOTOR POWERED ROLLER SHUTTER DOOR

CURTAIN: 75mm Spool Profile Lath with T or L Section Bottom Rail
MOTOR: Guthrie Douglas Range, With Emergency Operation and Safety Brake
FINISH: Full Galvanised, Outside Only PPC Or Full PPC
ACTIVATION: Roller Switch, Key Switch Or Remote Control Operation
OTHER: Canopy Gate Or Protected Lath

Aardee SECURITY	Aardee Security Ltd	Client: AN Other	CE No 0	Eng. No. 0
	2 Dalsholm Avenue Dawsholm Ind Est Glasgow G20 0TS Tel: 0141 810 3444 Fax: 0141 810 3777	Site: Various		Scale: To Not Scale Date: 15/07/08 Drawn By: J. STEWART

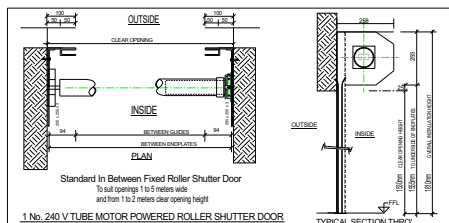

1 No. 240 V TUBE MOTOR POWERED ROLLER SHUTTER DOOR

CURTAIN: 75mm Spool Profile Lath with T or L Section Bottom Rail
MOTOR: Guthrie Douglas Range, With Emergency Operation and Safety Brake
FINISH: Full Galvanised, Outside Only PPC Or Full PPC
ACTIVATION: Roller Switch, Key Switch Or Remote Control Operation
OTHER: Canopy Gate Or Protected Lath

Aardee SECURITY	Aardee Security Shutters Ltd	Client: A N Other	Door No 0	Eng. No. 00
	2 Dalsholm Avenue Dawsholm Ind Est Glasgow G20 0TS Tel: 0141 810 3444 Fax: 0141 810 3777	Site: Various		Scale: To Not Scale Date: 15/07/08 Drawn By: J. STEWART

Aardee Security Limited

5 Dalsholm Ave, Dawsholm Industrial Estate, Glasgow, G20 0TS

Telephone: 0141 810 3444 Fax: 0141 810 3777

Email: sales@aardee.co.uk